



Estudio del uso potencial, como coagulante para tratamientos de agua potable, del extracto de semilla de Moringa Oleifera

Study of the Potential Use, as a Coagulant for Drinking Water Treatments, of Moringa Oleifera Seed Extract

Antonio Casañas¹, Nicolau Chirinza², Paulino Muguirrima³, Federico León Zerpa⁴, Carlos Mendieta Pino⁵

Tipo de Artículo: investigación.

Recibido: 23/04/2024. **Aprobado:** 14/11/2024. **Publicado:** 31/10/2025.

Resumen: El objetivo de este estudio es proponer el uso del extracto de semilla de Moringa oleifera como coagulante en el tratamiento de agua, evaluando su eficiencia en la eliminación de diversos parámetros considerados mínimos para garantizar su potabilidad, en comparación con el sulfato de aluminio como coagulante convencional. El coagulante a base de extracto de semilla de Moringa oleifera es de fácil adquisición y uso, y cuando

se prepara de forma optimizada, cumple con los estándares recomendados de potabilidad del agua. Desde una perspectiva ambiental, su uso resulta favorable, ya que no genera subproductos nocivos al medio ambiente.

Palabras clave: coagulante; semilla de Moringa oleifera; sulfato de aluminio.

- ¹ Autor correspondiente: Antonio Casañas. Mayor título: Máster en Ingeniería Industrial. Filiación institucional: Universidad de las Palmas de Gran Canaria. País: España, Ciudad: Palmas de Gran Canaria. Correo electrónico: tonicasanas@hotmail.com
- ² Autor correspondiente: Nicolau Chirinza. Mayor título: Ingeniero de Procesos. Filiación institucional: Universidad Zambeze. País: Mozambique, Ciudad: Beira. Correo electrónico: nicolau.chirinza101@alu.ulpgc.es. ORCID: 0009-0006-2260-1802
- ³ Autor correspondiente: Paulino Muguirrima. Mayor título: Ingeniero Físico. Filiación institucional: Universidad Zambeze. País: Mozambique, Ciudad: Beira. Correo electrónico: paulino.muguirrima101@alu.ulpgc.es. ORCID: 0000-0002-7253-3477
- ⁴ Autor correspondiente: Federico León Zerpa. Mayor título: Ingeniero Industrial. Filiación institucional: Universidad de las Palmas de Gran Canaria. País: España, Ciudad: Palmas de Gran Canaria. Correo electrónico: federico.leon@ulpgc.es. ORCID: 0000-0003-2284-8400
- ⁵ Autor correspondiente: Carlos Mendieta Pino. Mayor título: Ingeniero Industrial. Filiación institucional: Universidad de las Palmas de Gran Canaria. País: España, Ciudad: Palmas de Gran Canaria. Correo electrónico: carlos.mendiet@ulpgc.es. ORCID: 0000-0002-1808-0112

Abstract: The aim of this study is to propose the use of *Moringa oleifera* seed extract as a coagulant in water treatment, with a reference to its efficiency in removing various parameters considered to be the minimum necessary for water potability, compared to the use of aluminium sulphate as a coagulant. The *Moringa oleifera* seed extract coagulant is easy to acquire and use, and prepared in an optimised way, it complies with the recommended standards for water potability. In environmental terms, its use is recommended because it does not transmit harmful by-products to the environment.

Keywords: Coagulant; *Moringa oleifera* seed; Aluminium sulphate.

1. Introduction

Water treatment is a process in which the aim is to remove or eliminate organic matter, sludge, sand and analyse the physico-chemical and microbiological characteristics through regulations to make it ideal for human consumption [1].

The coagulation process is an essential stage in water purification. This depends on converting suspended particles into larger flocs that can settle or be easily filtered out of the water. This process involves the addition of certain chemicals called coagulants, which can help flocculate suspended particles in water. *Moringa* is sometimes used in the coagulation process in water treatment, where it is known to have certain proteins that are positively charged in solutions and can bind to negatively charged particles to remove turbidity from water [2, 3].

The use of *Moringa oleifera* seed as a coagulant presents some challenges to overcome, as the unfractionated seed also has other compounds that are released along with the cationic proteins of interest that can cause undesirable results, such as residual organic carbon and cytotoxicity after water treatment [4]. The core of *Moringa oleifera* seeds contains approximately 36.7% protein, 34.6% lipids and 5.0% carbohydrates (w/w), and as an undesirable consequence, these compounds (organic matter) can facilitate the new growth of microor-

ganisms and lead to the formation of disinfection by-products [2, 4].

Natural organic polymers have been used for more than 4,000 years in India, Africa, and China as efficient coagulants and as coagulation aids for high turbidity water for domestic use in rural areas. Beginning in the 19th century, chemical coagulants such as iron chloride III and aluminium sulphate where they came to be used all over the world to treat water for human consumption, which left the use of coagulants in the background, except in rural areas and developing countries that still use them. However, chemical coagulants have an impact on the environment and human health due to their composition and higher cost [1]. It is therefore extremely important to use natural products in order to minimise the environmental impact and unnecessary cost increases in water treatment [5, 6].

The general aim of this article is to propose the use of *Moringa oleifera* seed extract as a coagulant in the treatment of drinking water, comparing its efficiency with aluminium sulphate as a coagulant.

Water is one of the fundamental components of sustainable development and its conservation is essential for the preservation of biodiversity on our planet. Urbanisation, changes in production and consumption patterns in industrialised and developing nations provide current issues for water cycle management; wastewater sanitation is one of them posing a double threat to public health and environmental protection [7]. However, it is extremely imperative to adopt techniques aimed at treating water to meet the quality requirements of potability and environmental standards. The coagulation process is widely used in water and sewage treatment, as it is effective at removing suspended solids, turbidity, organic matter, oil, chemical oxygen demand (COD) and colour. The coagulation process is conducted by adding a coagulant that allows small, agglomerated particles (unstable fine particles) to form into larger flocs that can settle. Coagulation and flocculation are interlinked. Coagulation is the process of grouping under high-speed mixing, while flocculation is the process of sedimentation under gentle mixing. Colloidal particles are neg-

atively charged particles. Therefore, coagulation is a chemical process involving the neutralisation of these particles in water and wastewater, while flocculation is a physical process involving the formation of flocs from particles neutralised during the coagulation process. Thus, large flocs form during coagulation, and they aggregate and sediment during flocculation [9,11].

Coagulation sedimentation is widely used in water treatment due to its ease of maintenance and low operating cost. Drinking water processing relies heavily on coagulation sedimentation, which accounts for approximately 5% of the total cost of operating water treatment facilities [10].

It has been demonstrated that rapid stirring is an efficacious method for accelerating the formation of flocs, irrespective of the type of coagulant employed and the presence or absence of a coagulant aid.

The incorporation of chitosan during the initial stages of stirring has been demonstrated to enhance floc formation, as evidenced by the diminished residual turbidity.

The formation of large flocs did not necessarily result in a reduction in the final turbidity, contrary to the hypothesis. The utilisation of chitosan as a coagulant aid did not result in the attainment of the maximum floc size. However, the presence of dissolved chitosan appeared to result in a more uniform floc size, which in turn led to a faster reduction in residual turbidity.

A search for the isoelectric condition by varying the concentration of added moringa proved an effective method for identifying the optimum moringa concentration at which coagulation sedimentation occurs most efficiently, thereby reducing residual turbidity. This method was demonstrated to be efficacious even when the initial turbidity was markedly lower than that observed in wastewater. The utilisation of moringa as a coagulant aid may assist in reducing the risk of polluting drinking water, as it is a natural substance that is less deleterious than other synthetic chemicals. Given the abundance and ubiquity

of chitosan, it could be a promising candidate natural resource for replacing synthetic chemicals that have been used for treating drinking water.

II. Materials and Methods


The coagulation mechanism using *Moringa oleifera* to remove pollutants from water is due to the combination of the coagulation and charge neutralization mechanisms. This is like the coagulation mechanism of aluminium sulphate [11]. *Moringa oleifera* seeds contain significant amounts of soluble cationic proteins, and when they are ground into powder and added to turbid water, they release positive charges, attracting negatively charged particles such as mud, clay, bacteria and other particulates present in the water. Coagulation occurs when the cationic proteins bind to the negative particles, forming flakes [10]. *Moringa oleifera* can clarify high, medium, and low turbidity water [2,12]. While aluminium-based coagulants are efficient in a restricted range of pH levels in water treatment, the use of *Moringa oleifera* seeds is independent of the pH of the water to be treated for its efficiency.

Another beneficial effect that should be noted when *Moringa oleifera* is used as a coagulant is the effect of biological water treatment, which occurs concomitantly with coagulation. This effect is because *Moringa oleifera* contains an antimicrobial substance that acts on the microorganisms that are found in the particles suspended in the water and end up being eliminated along with the sludge [7,9,13]. The use of *Moringa oleifera* seeds and pods together with filtration in water treatment shows good results and reduces the use of non-biodegradable chemical coagulants, as well as having the advantages of less sludge generation, the production of biodegradable sludge, good removal of turbidity and colour, removal of almost 90% of bacteria and maintaining the pH of the water. Other advantages of the moringa seed extract are that it is easy to handle, involves simple technologies that unskilled professionals can operate, and is a biodegradable extract [14,15].

Regarding the quality of drinking water, a considerable number of water supply systems that provide drinking water to local people and communities around the world are fed by surface water sources [1,13].

The quality of surface water is important, among other concerns, due to its widespread use as the main source of drinking water for countless communities around the world (figure 1).

Figure 1. Conventional water treatment system

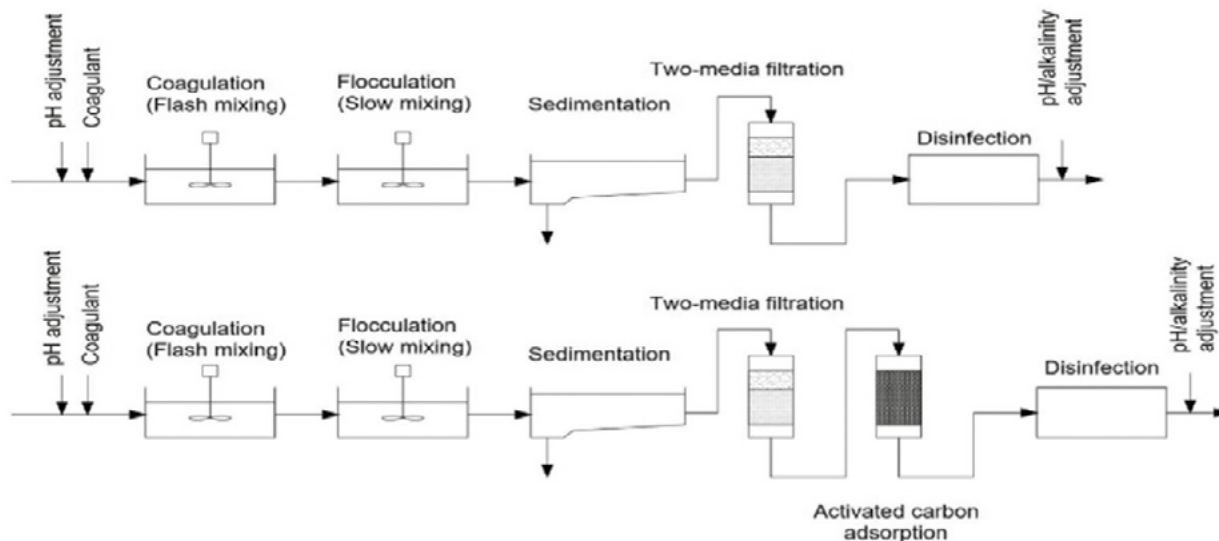

Note: adapted by Takaara [10].


Although the specific targets for surface water treatment can vary depending on the source, water quality and regulatory standards, the parameters that usually require reduction are the same for most surface waters and include turbidity, colour, and organic matter content. Current surface water purification methods include adsorption, membrane filtration, ion exchange, advanced oxidation processes and biological processes. However, traditional coagulation is still the most prevalent [12].

The conventional water treatment system consists of coagulation followed by sedimentation, filtration and often activated carbon adsorption (Figure 1) [10,12].

Preparation of the coagulating solution from *Moringa oleifera* seed extract

For the preparation of the bio-coagulant solution, the ideology of the various authors was followed Alam et al. [9] Alazaiza et al. [8]. According to the authors, for an initial turbidity of 50 NTU, the best dosage for the aqueous bio-coagulant would be at a concentration of 2%, with 2 g of the ground sample of *Moringa oleifera* seeds in 100 ml of distilled water. The procedure used was as follows:

a) Figure 2. Shows the *Moringa Oleifera* seeds in two scenarios: first, the seeds in their shells, and second, the seeds peeled with a knife

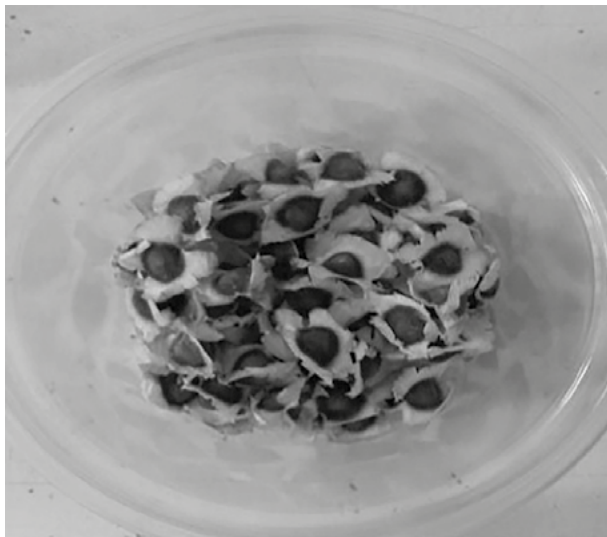

Note: self-made source.

Figure 3. Ground *Moringa* seed



Note: self-made source.

In order to improve contact between the particles, it was necessary to reduce the particle size of the seeds using a knife mill.

b) The active compound was extracted as follows:

I. Using a spatula and an analytical balance, 2 g of *Moringa oleifera* seed powder was weighed.

II. A 100 ml beaker was used to measure 100 ml of distilled water.

III. 2 g of *Moringa oleifera* seed powder was added to a 600 ml beaker and then 100 ml of distilled water was added to the same beaker.

IV. The mixture was placed on a magnetic stirrer for high agitation for 4 minutes. The solution obtained under these conditions corresponds to a concentration of ground *Moringa oleifera* seeds of 20 g/l.

The mixture of ground *Moringa oleifera* seeds and distilled water results in a whitish liquid with an intense odour. Its shelf life is limited due to its biodegradation. For this reason, the *Moringa oleifera* seed extract solutions were prepared on the days of the Jar Test.

III. Results and Discussion

After collecting the samples, it was necessary to carry out an analysis of the different parameters including turbidity, total dissolved solids, temperature, pH, aluminium, iron and manganese before the Jar Test, so that a comparison could then be made of the parameters analysed before and after the treatment of the raw water. It should be noted that Table 1 shows the values for the analyses of the raw water parameters.

Table 1. Results of the analyses of the various parameters in the raw water

Raw water	Turbidity (NTU)	TDS (mg/l)	Temperature (°C)	pH	Al (mg/l)	Fe (mg/l)	Mn (mg/l)
Sample 1	44	89,9	34,0	7,54	0,095	1,500	0,8
Sample 2	30	84,3	35,6	7,61	0,082	0,101	0,5
Sample 3	57	86,2	33,2	7,43	0,109	1,520	0,3

Note: author's source (2023).

a) Jar test using coagulant solution from *Moringa oleifera* seed extract

Table 2. Turbidity results in jar tests using the *Moringa oleifera* seed extract coagulant solution

Volume (ml)	4	5	6	7	8
Turbidity after test 1 (NTU)	10,4	8,6	6,8	4,9	6,2
Turbidity after test 2 (NTU)	6,6	6,0	5,9	5,6	4,4
Turbidity after test 3 (NTU)	5,8	5,4	6,1	16,15	15,1

Note: author's source (2023).

b) Jar test using aluminium sulphate coagulant solution

Table 3. Results of jar tests using the aluminium sulphate coagulant solution

Volume (ml)	4	5	6	7	8
Turbidity after test 1 (NTU)	29,0	11,2	9,1	3,9	3,4
Turbidity after test 2 (NTU)	27,6	17,0	5,84	3,9	3,0
Turbidity after test 3 (NTU)	8,81	4,2	4,8	5,9	6,0

Note: author's source (2023).

After the Jar Tests using the *Moringa oleifera* seed extract coagulant solution and the aluminium sulphate coagulant solution, the samples with the best turbidity were kept. Then the parameters (turbidity, total dissolved solids, temperature, pH, aluminium, iron and manganese) were analysed.

Table 4. Results of the parameter analyses after treating the raw water with the coagulating solution from the *Moringa oleifera* seed extract

	Turbidity (NTU)	TDS (mg/l)	Temperature (°C)	pH	Al (mg/l)	Fe (mg/l)	Mn (mg/l)
Test 1	4,9	89,8	34,0	7,76	0,034	0,23	0,3
Test 2	4,4	89,9	33,3	7,74	0,047	0,10	0,3
Test 3	5,4	80,2	33,8	7,32	0,008	0,15	0,3

Note: author's source (2023).

Table 5. Results of the parameter analyses after treating the raw water with the Aluminium Sulphate coagulant solution

	Turbidity (NTU)	TDS (mg/l)	Temperature (°C)	pH	Al (mg/l)	Fe (mg/l)	Mn (mg/l)
Test 1	3,4	97,5	34,3	6,51	0,108	0,27	0,5
Test 2	3,0	101,1	32,6	6,73	0,102	0,51	0,5
Test 3	4,2	94,4	32,9	6,70	0,115	0,18	0,7

Note: author's source (2023).


Comparative evaluation of parameter concentration removal efficiency in raw water treatment using Moringa oleifera extract coagulant Vs Aluminium sulphate coagulant.

Turbidity

Table 6. Turbidity removal efficiency at the end of the tests using the Moringa oleifera seed extract coagulant solution and the aluminium sulphate coagulant solution

	Turbidity removal efficiency with Moringa oleifera (%)	Turbidity removal efficiency with aluminium sulphate (%)
Test 1	88,86364	92,27273
Test 2	85,33333	90
Test 3	90,52632	92,63158

Note: author's source (2023).

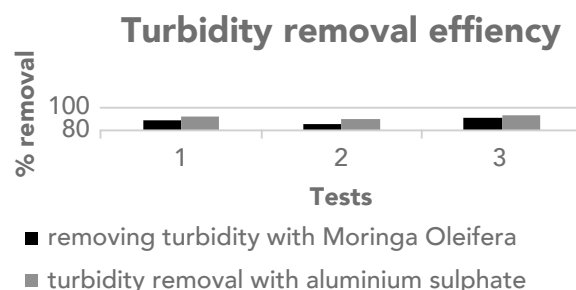Figure 4. Comparative evaluation of turbidity removal efficiency at the end of the tests using the Moringa oleifera seed extract coagulant solution and the aluminium sulphate coagulant solution

Note: author's source (2023).

The use of the Moringa Oleifera extract coagulant obtained inferior results in relation to the removal efficiency using the Aluminium Sulphate coagulant, but according to [16, 17]. However, at the end of the tests, the use of the Moringa oleifera seed extract coagulant solution achieved up to 90.52632% removal in test 3, and in tests 1 and 2 it removed 88.86364 and 85.33333%, respectively.

c) Total dissolved solids


Table 6 and Figure 5 show the total dissolved solids removal efficiency values after the tests using the Moringa oleifera seed extract coagulant solution and the aluminium sulphate coagulant solution.

Table 7. Comparative evaluation of total dissolved solids removal efficiency at the end of the tests using the Moringa oleifera seed extract coagulant solution and the aluminium sulphate coagulant solution

	TDS removal efficiency with Moringa oleifera (%)	TDS removal efficiency with aluminium sulphate (%)
Test 1	0,11123	-8,4538
Test 2	-6,6429	-19,929
Test 3	6,96056	-9,5128

Note: author's source (2023).

Figure 5. Comparative graphical representation of the total dissolved solids removal efficiency at the end of the tests using the Moringa oleifera seed extract coagulant solution and the aluminium sulphate coagulant solution

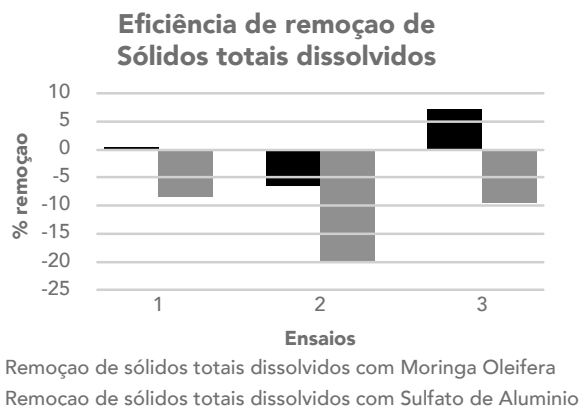

Note: author's source (2023).

The results for total dissolved solids removal efficiency showed low removal efficiency for both the treatment with the Moringa oleifera seed extract coagulant solution and the aluminium sulphate coagulant solution, but the use of the Moringa oleifera seed extract coagulant solution proved to be more efficient at removing total dissolved solids, with up to 6.96056% removal for trial 3. For the treatment with aluminium sulphate, the results were not satisfactory, obtaining negative values, i.e. increasing the concentration of total dissolved solids in all tests.

d) Temperature


Table 8 and Figure 6 show the temperature variation values after the tests using the Moringa oleifera seed extract coagulant solution and the aluminium sulphate coagulant solution.

Table 8. Temperature variation at the end of the tests using the Moringa oleifera coagulant solution and the aluminium sulphate coagulant solution

	Temperature variation with Moringa oleifera	Temperature variation with aluminium sulphate
Test 1	0	0,3
Test 2	-2,3	-3
Test 3	0,6	-0,3

Note: author's source (2022).

Figure 6. Temperature variation at the end of the tests using the Moringa oleifera seed extract coagulant solution and the aluminium sulphate coagulant solution

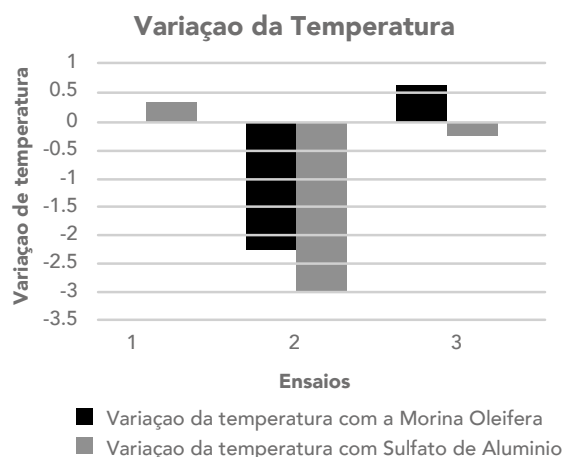

Note: author's source (2003).

Table 8 and Figure 6 show that there were small variations in temperature at the end of the tests. The temperature values at the end of the tests remained close to the raw water value for each sample, with a maximum variation of 3 °C more for test 2 using the aluminium sulphate coagulant solution and a minimum variation of 0 °C for test 1 using the Moringa oleifera seed extract coagulant solution.

Hydrogen potential


Table 9 and Figure 7 show the pH variation values after the tests using the Moringa oleifera seed extract coagulant solution and the aluminium sulphate coagulant solution.

Table 9. pH variation at the end of the tests using the Moringa oleifera seed extract coagulant solution and the aluminium sulphate coagulant solution

	pH variation with Moringa oleifera	pH variation with aluminium sulphate
Test 1	0,22	-1,03
Test 2	0,13	-0,88
Test 3	-0,11	-0,73

Note: author's source (2023).

Figure 7. pH variation at the end of the tests using the Moringa oleifera seed extract coagulant solution and the aluminium sulphate coagulant solution

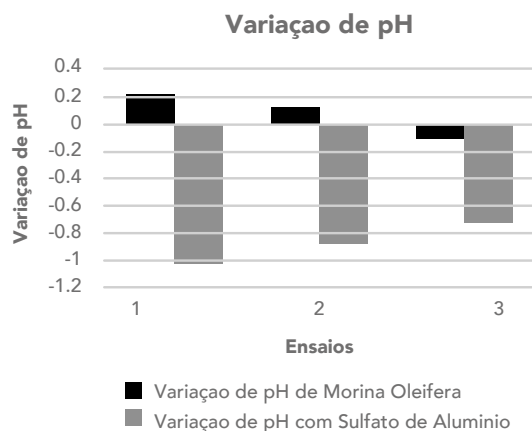

Note: author's source (2023).

Several studies that have used aluminium sulphate to treat water point to a decrease in pH in relation to its initial value [18, 19]. During the coagulation/flocculation and sedimentation tests, this drop was seen in the pH values of the tests using the aluminium sulphate coagulant solution, and when using the Moringa oleifera seed extract coagulant solution, there was a slight increase in values in tests 1

and 2, and a slight drop in test 3 in relation to the initial values.

Table 8 and Figure 7 show that there were greater variations in pH in the tests using the aluminium sulphate coagulant solution. The pH values at the end of the tests showed that the use of the Moringa oleifera seed extract coagulant solution was more satisfactory than those obtained using the aluminium sulphate coagulant solution, with the smallest variation being 0.11 units less in test 3 using the Moringa oleifera seed extract coagulant solution and the largest variation being 1.03 units less in test 1 using the aluminium sulphate coagulant solution.

e) Aluminium


Table 10 and Figure 8 show the aluminium removal efficiency values after the tests using the Moringa oleifera seed extract coagulant solution and the aluminium sulphate coagulant solution.

Table 10. Aluminium removal efficiency at the end of the tests using the Moringa oleifera seed extract coagulant solution and the aluminium sulphate coagulant solution

	Aluminium removal efficiency with Moringa oleifera (%)	Aluminium removal efficiency with aluminium sulphate (%)
Test 1	64,21053	-13,6842
Test 2	42,68293	-24,3902
Test 3	92,66055	-5,50459

Note: author's source (2023).

Figure 8. Aluminium removal efficiency at the end of the tests using the *Moringa oleifera* seed extract coagulant solution and the aluminium sulphate coagulant solution

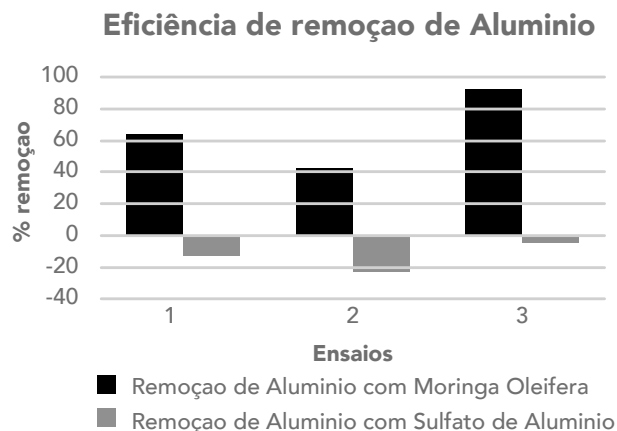

Note: author's source (2023).

Aluminium removal in the treatment with the *Moringa oleifera* seed extract coagulant solution showed better efficiency, reaching up to 92.66055% in trial 3, and was more efficient in all trials, with trials 1 and 2 removing up to 64.21053 and 42.68293%. With the use of the aluminium sulphate coagulant solution, the results were negative in terms of removal, with an increase in the concentration of aluminium of up to 24.3902% in the treatment of sample 2, with samples 1 and 3 having an increase of 13.6842% and 5.50459% in relation to the raw water for both samples.

f) Iron


Table 11 and Figure 9 show the iron removal efficiency values after the tests using the *Moringa oleifera* seed extract coagulant solution and the aluminium sulphate coagulant solution.

Table 11. Iron removal efficiency at the end of the tests using the *Moringa oleifera* seed extract coagulant solution and the aluminium sulphate coagulant solution

	Iron removal efficiency with <i>Moringa oleifera</i> (%)	Iron removal efficiency with aluminium sulphate (%)
Test 1	84,6667	82
Test 2	90,099	49,505
Test 3	90,1316	88,1579

Note: author's source (2023).

Figure 9. Ferron removal efficiency at the end of the tests using the *Moringa oleifera* seed extract coagulant solution and the aluminium sulphate coagulant solution

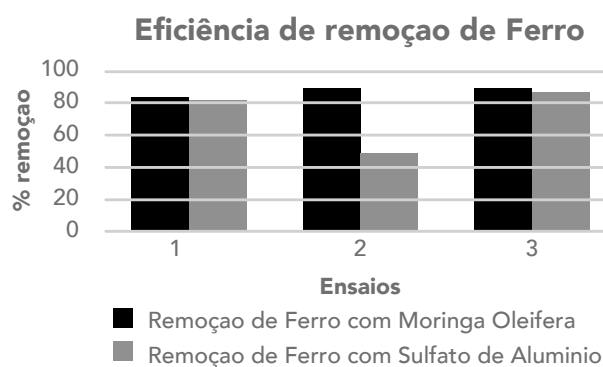

Note: author's source (2023).

For iron removal, the treatment with the *Moringa oleifera* seed extract coagulant solution showed better efficiency, reaching up to 90.1316% in trial 3, and was more efficient in all trials, with trials 1 and 2 removing up to 84.6667 and 90.099%. With the use of the aluminium sulphate coagulant solution, the results were lower than those obtained with the use of the *Moringa oleifera* seed extract coagulant solution, but satisfactory, achieving a maximum removal efficiency of 88.1579% in test 3, with tests 1 and 2 having reduced it by 82 and 49.505% compared to the raw water for both samples.

g) Manganese


Table 12 and Figure 10 show the manganese removal efficiency values after the tests using the Moringa oleífera seed extract coagulant solution and the aluminium sulphate coagulant solution.

Table 12. Manganese removal efficiency at the end of the tests using the Moringa oleífera seed extract coagulant solution and the aluminium sulphate coagulant solution

	Manganese removal efficiency with Moringa Oleífera (%)	Emotional manganese removal efficiency with aluminium sulphate (%)
Test 1	62,5	37,5
Test 2	40	0
Test 3	0	-133,333

Note: author's source (2023).

Figure 10. Manganese removal efficiency at the end of the tests using the Moringa Oleífera seed extract coagulant solution and the Aluminium Sulphate coagulant solution

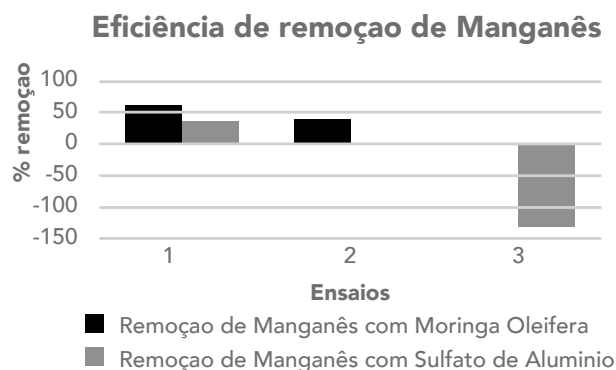

Note: author's source (2023).

For manganese removal, treatment with the Moringa oleífera seed extract coagulant solution showed better efficiency, reaching up to 62.5% in trial 1, and was more efficient in all trials, with trials 2 and 3 reducing 40 and 0% of manganese. With the use of the aluminium sulphate coagulant solution, results were lower than those obtained with the use of the Moringa oleífera seed extract coagulant

solution, achieving a maximum removal efficiency of 37.5% in trial 1, with trial 2 maintaining the same concentration in relation to the raw water and trial 1 increasing 133.333% in relation to the raw water.

IV. Conclusions

The use of Moringa oleífera coagulant is highly recommended because it is optimally prepared and meets the required standard for water potability. In terms of economic evaluation and environmental quality, the use of Moringa oleífera coagulant is also unbelievably valuable, as its acquisition and preparation does not require a great deal of technology or energy. The results obtained in the laboratory analyses of the various parameters in three tests showed satisfactory results and perfect removal efficiency, although the use of the coagulant in the proposal is recommended. With regard to environmental quality, it does not contribute contaminating by-products to the environment or the possibility of contaminating the treated water.

V. Acknowledgements

This project was made possible with the unconditional contribution of the students of Industrial Process Engineering 2023 edition, third year who were involved in the search for the materials used. This research was co-funded by the INTERREG V-A Cooperation, Spain-Portugal MAC (Madeira-Azores-Canaries) 2014-2020 programme, MITIMAC project (MAC2/1.1a/263).

VI. References

- [1] S. Urrea-Florián and A. Torres-Benítez, "Evaluation of Seeds Moringa oleífera Lam. Present in Urban Forests as a Coagulant-Flocculant for Water Treatment", vol. 4, n° 1, 2021. <https://doi.org/10.3390/IECPS2020-08553>
- [2] M. Elsergany, "The Potential Use of Moringa peregrina Seeds and Seed Extract as a Bio-Coagulant for Water Purification", Water, vol. 15, n° 15, 2023.

- [3] P. Thanekar and P. Gogate, "Application of hydrodynamic cavitation reactors for treatment of wastewater containing organic pollutants: Intensification using hybrid approaches", *Fluids*, vol. 3, n° 4, 2018.
- [4] G. G. Chales, B. S. Tihameri, N. V. M. Milhan, C. Y. Koga-Ito, M. L. P. Antunes and A. G. Reis, "Impact of Moringa oleifera Seed-Derived Coagulants Processing Steps on Physicochemical, Residual Organic, and Cytotoxicity Properties of Treated Water", *Water*, vol. 14, n° 13, 2022.
- [5] J. C. Piñero, S. K. Souder, T. R. Smith and R. I. Vargas, "Attraction of Bactrocera cucurbitae and Bactrocera dorsalis (Diptera: Tephritidae) to beer waste and other protein sources laced with ammonium acetate", 2017.
- [6] A. C. Rodrigues, P. Moreira, J. A. Oliveira, J. M. Oliveira, L. Melo and A. G. Brito, "Liquid effluent treatment in the food industry: the case of the wine and beers sectors".
- [7] A. Hadadi, A. Imessaoudene, J. C. Bollinger, A. A. Assadi, A. Amrane and L. Mouni, "Comparison of Four Plant-Based Bio-Coagulants Performances against Alum and Ferric Chloride in the Turbidity Improvement of Bentonite Synthetic Water", *Water*, vol. 14, n° 20, 2022.
- [8] M. Y. D. Alazaiza, A. Albahnasawi, G. Ali, M. J. K. Bashir, D. E. Nassani, T. Al Maskari, S. S. Abu Amr and M. S. S. Abujazar, "Application of natural coagulants for pharmaceutical removal from water and wastewater: A Review", *Water*, vol. 14, n° 2, 2022.
- [9] M. W. Alam, P. Pandey, F. Khan, B. Souayah and M. Farhan, "Study to investigate the potential of combined extract of leaves and seeds of moringa oleifera in groundwater purification" *Int. Journal Environ. Res. Public Health* vol. 17, n° 20, pp.1-13, 2020.
- [10] T. Takaara and K. Kurumada, "Optimum conditions for enhancing chitosan-assisted coagulation in drinking water treatment", *Sustainability* vol. 15, n° 19, 14197, 2023.
- [11] M. Y. D. Alazaiza, A. Albahnasawi, G. Ali, M. J. K. Bashir, D. E. Nassani, T. Al Maskari, S. S. Abu Amr and M. S. S. Abujazar, "Application of natural coagulants for pharmaceutical removal from water and wastewater: a review", *Water* vol. 14, n° 2, 2022.
- [12] A. Knap-Bałydyga and M. Żubrowska-Sudoł, "Natural organic matter removal in surface water treatment via coagulation-current issues, potential solutions, and new findings", *Sustainability*, vol. 15, n° 18, 13853, 2023.
- [13] T. Ribeiro, F. J. Ladeia Janz, D. Vizibelli, J. Borges, J. A. Borssoi, A. A. Fukumoto, R. Bergamasco, N. Ueda Yamaguchi and E. R. Pereira, "Magnetic natural coagulants for plastic recycling industry wastewater treatability", *Water* vol. 15, n° 7, 2023.
- [14] S. M. Khumalo, B. F. Bakare, S. Rathilal and E. K. Tetteh, "Characterisation of South African brewery wastewater: oxidation-reduction potential variation", *Water*, vol. 14, n° 10, 2022.
- [15] S. Kesarwani, D. Panwar, J. Mal, N. Pradhan and R. Rani, "Constructed wetland coupled microbial fuel cell: a clean technology for sustainable treatment of wastewater and bioelectricity generation", *Fermentation*, vol. 9, n° 1, 2023.
- [16] I. Naz, I. Ahmad, R. W. Aslam, A. Quddoos and A. Yaseen, "integrated assessment and geostatistical evaluation of groundwater quality through water quality indices", *Water*, vol. 16, n° 1, 63, 2023.

- [17]** A. P. Periyasamy, "Recent advances in the remediation of textile-dye-containing wastewater: prioritising human health and sustainable wastewater treatment", *Sustainability*, vol. 16, n° 2, 2024.

- [18]** J. Ramsuroop, L. Gutu, W. B. Ayinde, M. Basitere and M. S. Manono, "A Review of biological processes for dairy wastewater treatment and the effect of physical parameters which affect their efficiency", *Water*, vol. 16, n° 4, 537, 2024.

- [19]** P. Sanciolo, A. K. Sharma, D. Navaratna and S. Muthukumaran, "Stormwater treatment using natural and engineered options in an urban growth area: a case study in the West of Melbourne," *Water*, vol. 15, n° 23, 2023.